


**PIN ASSIGNMENT:**

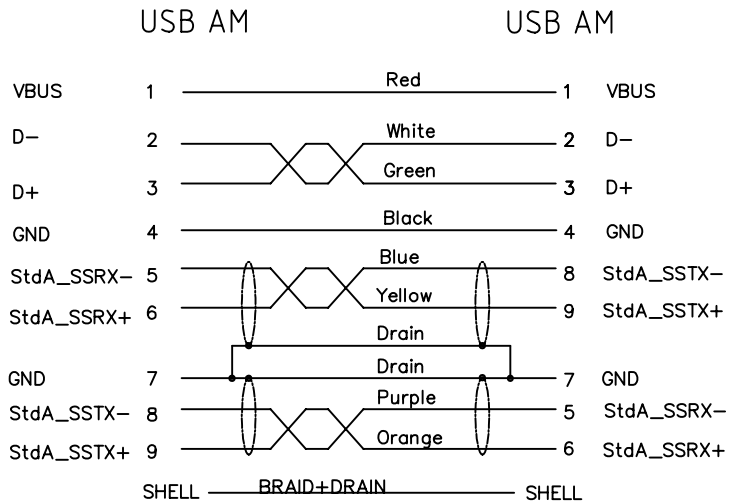

**ELECTRICAL CHARACTER:**

- 1)100% OPEN&SHORT TESTING
- 2)WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- 3)INSULATION RESISTANCE:10M Ohm(Min)
- 4)CONDUCTIVE RESISTANCE: 2 Ohm(Max)

3	OVERMOLD	PVC 70Pa										
2	CONNECTOR	USB 3.0AM Type CONNECTER										
1	CABLE	UL20276 USB 3.0 CABLE										
NO.	PART NAME	SPEC DESCRIPTION	REMAKE									
INNERMOLD		TOLERANCE UNSPECIFIED										
M2US009M0N00		ANGLE										
		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align:center;">SCALE</td> <td style="text-align:center;">NON</td> <td style="text-align:center;">UNIT</td> <td style="text-align:center;">mm</td> </tr> </table>	SCALE	NON	UNIT	mm						
SCALE	NON	UNIT	mm									
		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align:center;">DRAWN: Haitao 2010/8/31</td> <td rowspan="3" style="text-align:center; vertical-align:middle;"> <b>NAME</b> USB 3.0 Plug to PLUG Cable             </td> <td rowspan="3" style="text-align:center; vertical-align:middle;"> <b>SHEET</b> 1/2             </td> </tr> <tr> <td style="text-align:center;">DESIGNER: Bruce</td> </tr> <tr> <td style="text-align:center;">CHECKED: Robert</td> </tr> <tr> <td colspan="2" style="text-align:center;">APPROVED: Dived</td> <td style="text-align:center;"> <b>DRAWING NO.</b> CS-083110-HT01             </td> <td style="text-align:center;"> <b>REV</b> 1.0             </td> </tr> </table>	DRAWN: Haitao 2010/8/31	<b>NAME</b> USB 3.0 Plug to PLUG Cable	<b>SHEET</b> 1/2	DESIGNER: Bruce	CHECKED: Robert	APPROVED: Dived		<b>DRAWING NO.</b> CS-083110-HT01	<b>REV</b> 1.0	
DRAWN: Haitao 2010/8/31	<b>NAME</b> USB 3.0 Plug to PLUG Cable	<b>SHEET</b> 1/2										
DESIGNER: Bruce												
CHECKED: Robert												
APPROVED: Dived		<b>DRAWING NO.</b> CS-083110-HT01	<b>REV</b> 1.0									