



1	2		3		4		5		6		7		8
CUSTOMER	CUST P/N	FREEPORT P/N			REV	ZONE	LTR	DESCRIPTION		DATE	REVISER	APPD	
All		18-940411xx											

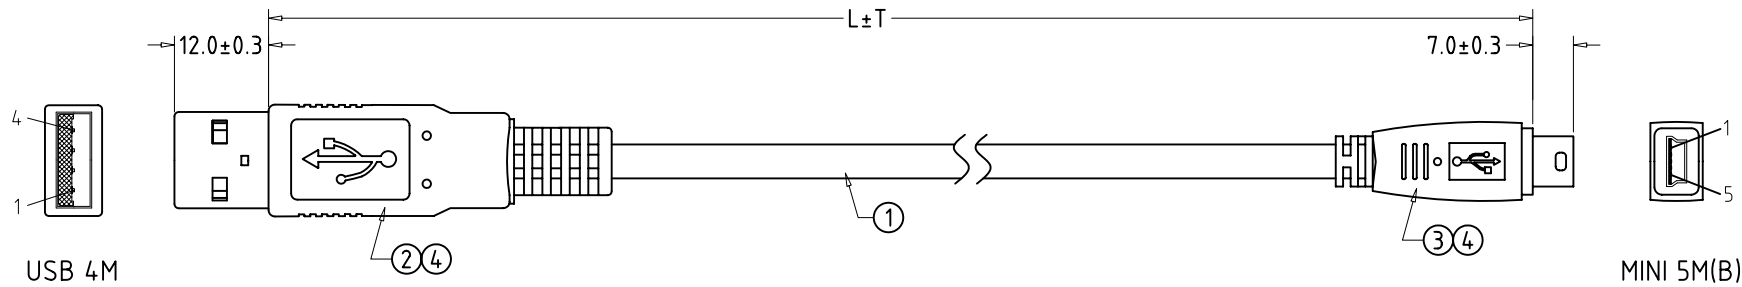

**RoHS Compliant**

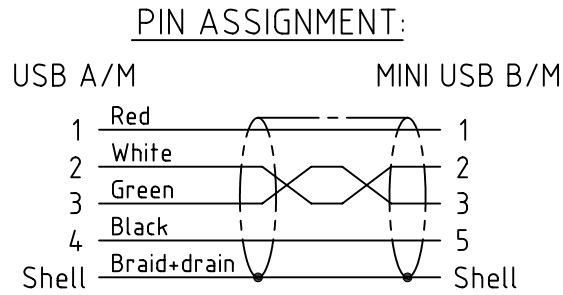


- . MATERIAL:
- 1)CABLE:UL2725(1P+2C)+AEB (USB 2.0Rev)
  - 2)CONN:USB 4M A TYPE
  - 3)CONN:MINI USB 5P M B TYPE
  - 4)OVERMOLD:PVC 45Pa UL94V-0
- . ELECTRICAL CHARACTER:
- 1)100% OPEN&SHORT TESTING
  - 2)WITHSTANDING VOLTAGE:DC 300V 0.01Sec
  - 3)INSULATION RESISTANCE:10M Ohm(Min)
  - 4)CONDUCTIVE RESISTANCE:2 Ohm(Max)

. Produce must be conform to RoHS specification

MATERIAL	TOLERANCE UNSPECIFIED		<b>FREEPORT</b>	
	.xxx	±		
	.xx	±	NON	mm
	.x	±	NAME	
FINISH	ANGLE	±	SHEET	
	DRAWN:	Frank	1/1	
	DESIGNER:		USB CABLE	
	CHECKED:	Kris	DRAWING NO.	REV
	APPROVED:	Dived	18-940411xx	1.0

1		2		3		4		5		6		7		8	
CUSTOMER	CUST P/N	FREEPORT P/N		REV	ZONE	LTR	DESCRIPTION				DATE	REVISER	APPD		
All		18-940412xx													

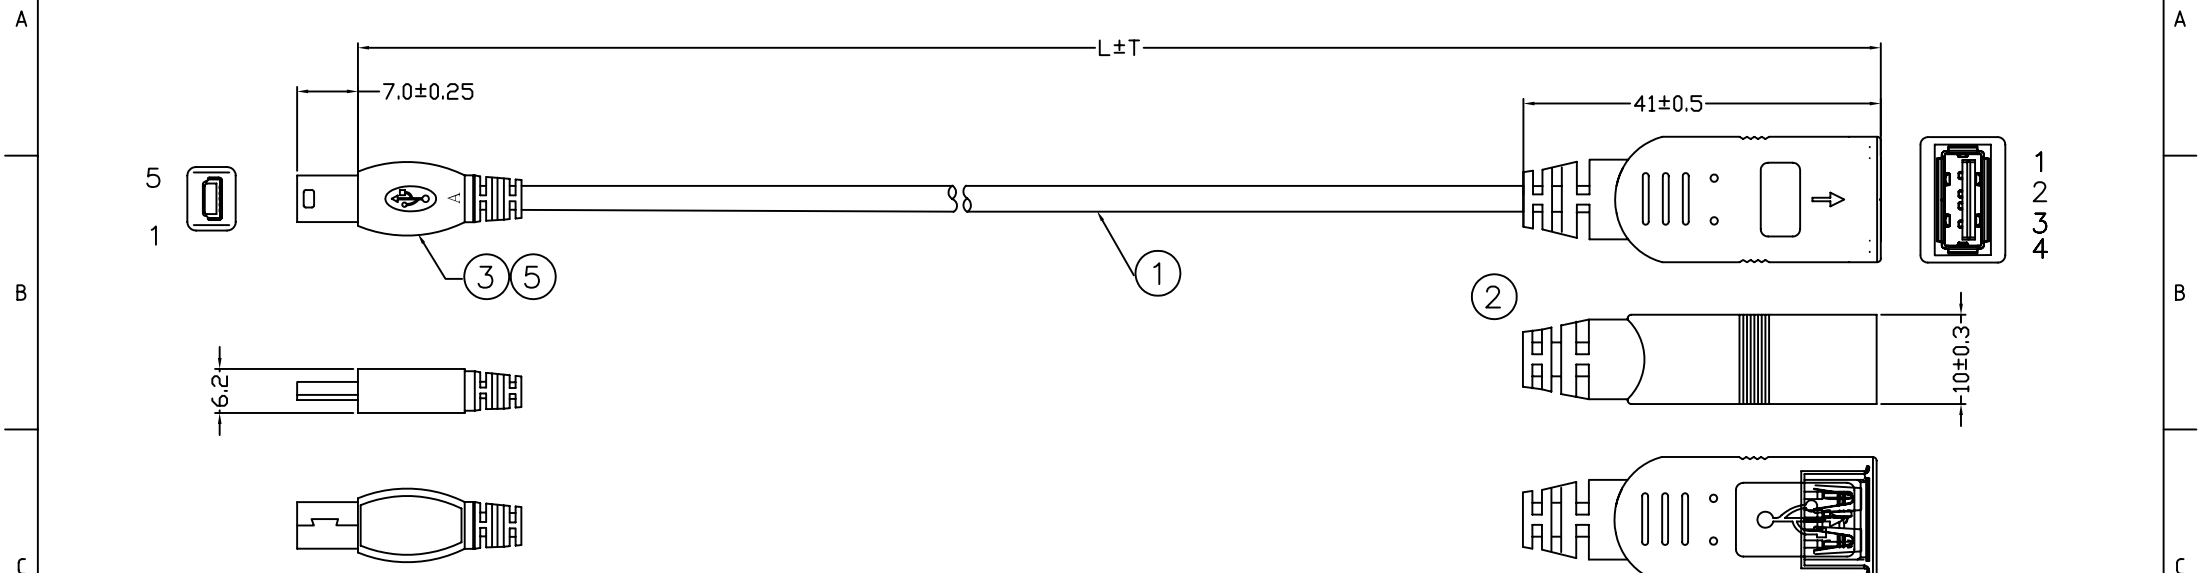

**RoHS Compliant**

**Specification:**

1. 100% OPEN SHORT AND MISS WIRE TESTS.
2. Current Rating: DC 1A
3. Insulation Resistance: DC300V,  $R \geq 10M\Omega$
4. Contact Resistance:  $2\Omega$  MAX


**PIN ASSIGNMENT:**

P1	COLOR	P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL	SHIELD	SHELL

5	OVERMOLD	45PA PVC	
4	PREMOLD	PE LOW DENSITY	
3	CONN	MINI USB 5P MALE A TYPE	
2	CONN	USB 4P FEMALE A TYPE SOLDER TYPE	
1	CABLE	(USB 2.0 REV)UL2725 1P+2C+AEB	
NO.	PART NAME	DESCRIPTION	Remark

MATERIAL 	TOLERANCE UNSPECIFIED .xxx ± .xx ± .x ± ANGLE ±	<b>FREEPORT</b>		
				SCALE NON
	FINISH 	DRAWN: Frank	NAME <b>USB CABLE</b>	
		DESIGNER:		
	CHECKED: Kris			
	APPROVED: Dived	DRAWING NO. 18-940412xx	SHEET 1/1	
			REV 1.0	

1	2		3			4		5		6		7		8
CUSTOMER	CUST P/N	FREEPORT P/N	REV	ZONE	LTR	DESCRIPTION			DATE	REVISER	APPD			
All		18-940413xx												

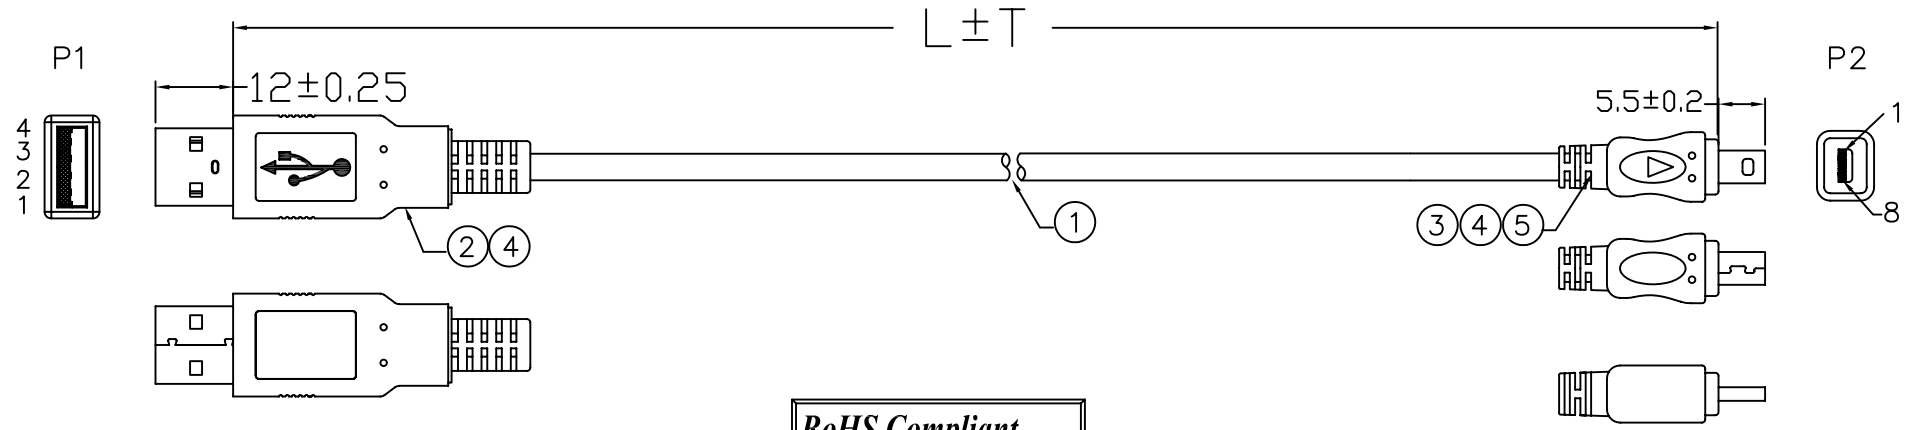

**RoHS Compliant**

PIN ASSIGNMENT:

P1	COLOR	P2
1	RED	1
2	WHITE	2
3	GREEN	4
4	BLACK	8
SHELL	SHIELD	SHELL

Specification:

- 100% OPEN SHORT AND MISS WIRE TESTS.
- Current Rating: DC 1A
- Insulation Resistance: DC300V,  $R \geq 10M\Omega$
- Contact Resistance:  $2\Omega$  MAX

5	PE	MOLDING PE	
4	OVERMOLD	MOLDING PVC 45Pa	
3	CONN	MINI USB 8PM(MOLDING TYPE)	
2	CONN	USB A TYPE MALE SOLDER TYPE	
1	CABLE	(USB 2.0 REV)UL2725 1P+2C+AL+Drain+Braid	
NO.	PART NAME	DESCRIPTION	Remark

MATERIAL	TOLERANCE UNSPECIFIED .xxx ± .xx ± .x ± . ± ANGLE ±	<b>FREEPORT</b>	
FINISH	DRAWN: Frank DESIGNER: CHECKED: Kris APPROVED: Dived	SCALE NON UNIT mm	SHEET 1/1
		NAME USB CABLE	REV 1.0
		DRAWING NO. 18-940413xx	



