


PIN ASSIGNMENT:

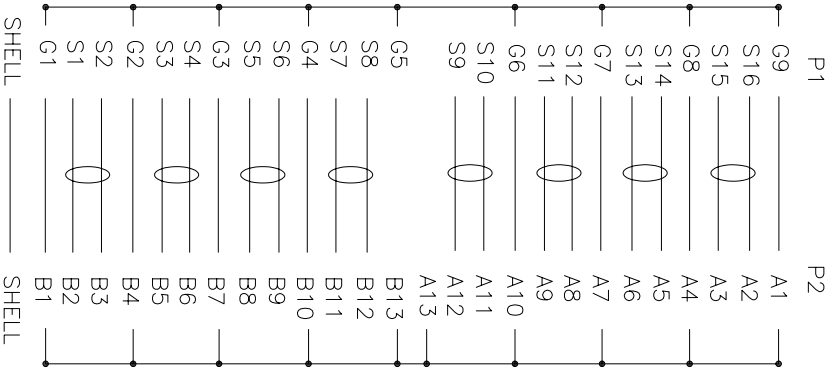


- Electrical character:
- a. 100% open & short testing.
 - b. Withstanding voltage: DC 300V 0.01Sec.
 - c. Insulation resistance: 10M Ohm(Min).
 - d. Conductive resistance: 2 Ohm(Max).

3	CONN.2	SAS 4x PLUG CONNECTOR
2	CONN.1	MINI SAS 4x PLUG CONNECTOR
1	CABLE	(28AWG*2C+D+HMAM+HM)*8PCS+M+AM+B BLACK

NO.	PART NAME	SPEC DESCRIPTION

INNERMOLD	TOLERANCE UNSPECIFIED	

OVERMOLD		



NAME: Infiniband(4x) to MiniSAS26M CABLE

SCALE: NON

UNIT: mm

SHEET: 1/1