

PIN ASSIGNMENT:

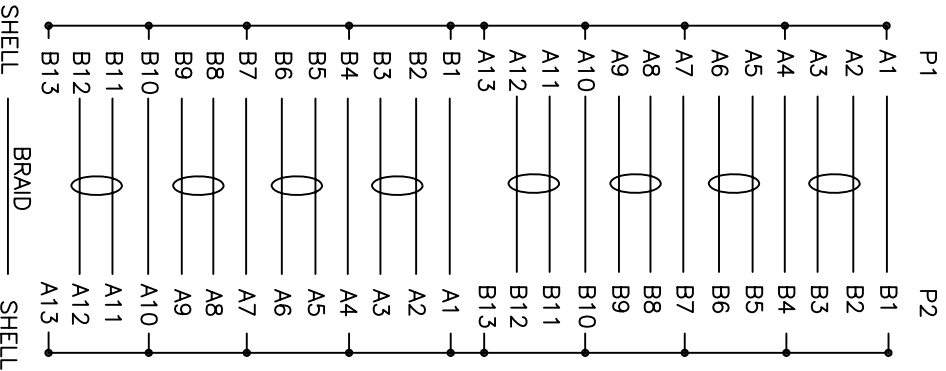


TABLE A

FREEPOR P/N	LENGTH(mm)
18-9426***1	500±20
18-9426***2	750±30
18-9426***3	1000±30
18-9426***4	1250±30
18-9426***5	1500±40
18-9426***6	2000±40

NOTE:


. MATERIAL DESCRIPTION:

1. CABLE:UL20276 (2C+D+AL+ML)*8C+ ML+AB+P OD:7.6mm BLACK
2. MINI SAS 4X CONNECTOR SHELL NI_PLATED W/BLUE PULL
3. INNER MOLD: PE LOW DESNGE

. ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

TOLERANCE UNSPECIFIED		
ANGLE		
DRAWN: TDM		
DESIGNER:	NAME	SCALE
CHECKED:	Mini SAS 4x to Mini SAS 4x	NON
APPROVED:	DRAWING NO. 18-9426***	UNIT mm
		SHEET 1/1
		REV 1.0



SCALE NON

UNIT mm

NAME Mini SAS 4x to Mini SAS 4x

DRAWING NO. 18-9426***

REV 1.0