


PIN ASSIGNMENT:

(controller end)

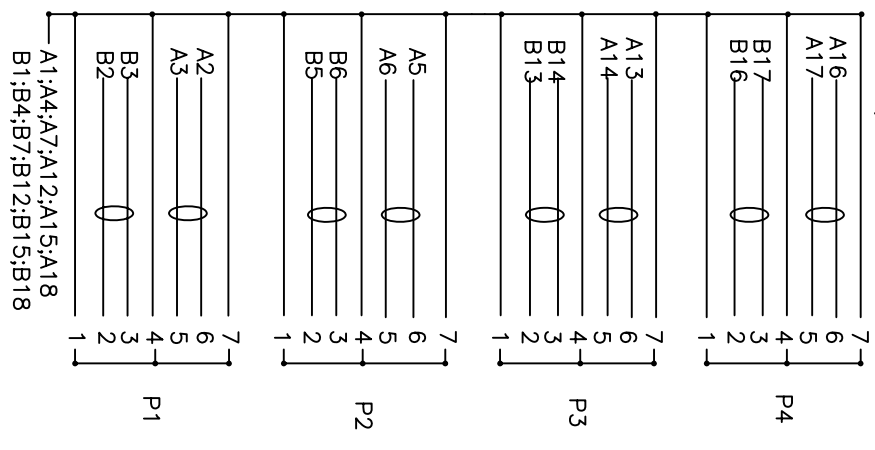


NOTE:

. MATERIAL DESCRIPTION:

1. (28AWG\*2C+2D)\*AL.MYLAR+MYLAR W/O JACKET
2. MINI SAS 4I PLUG CONNECTOR W/LATCH W/PCB
3. OVER MOLD:PVC BLACK UL94V-0
4. INNER MOLD: PE LOW DESNGICE
5. HEAT SHRINK TUBE BLACK ID:9.5mm
6. Woven Sleeving Black
7. SATA 7P RECEPTACLE G/F CONTACT
8. LABEL PRINT P1 & P2 & P3 & P4

. ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

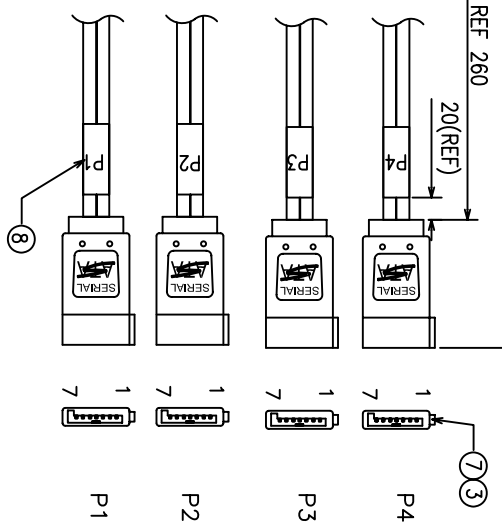

TOLERANCE UNSPECIFIED		SCALE NON		UNIT mm	
ANGLE	±	X		NAME	
DRAWN:	MIKEY	Mini SAS 4i (controller end) to		SHEET	
DESIGNER:		SATA plug * 4		1/1	
CHECKED:		DRAWING NO. 18-95362***		REV 1.0	
APPROVED:					

