





CUSTOMER	CUST P/N	PREPRT P/N	REV	ZONE	LTR	DESCRIPTION	DATE	REV/SER	APPD
1	2	3	4	5	6	7	8		

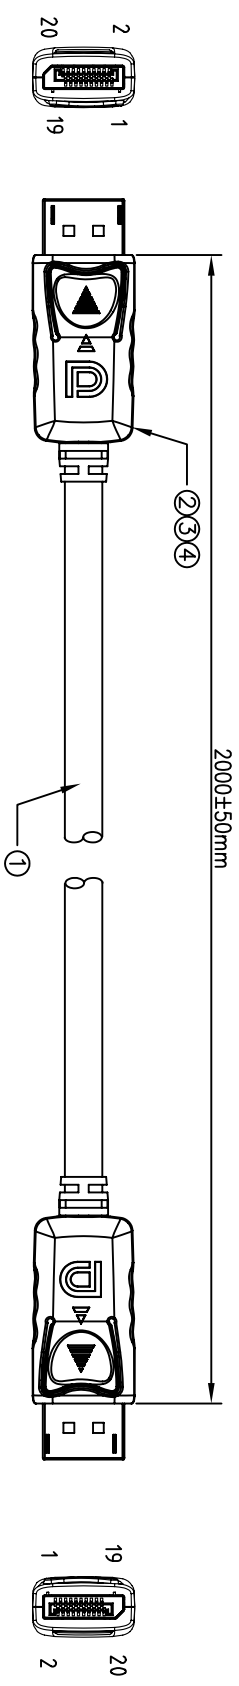

RoHS Compliant

PIN ASSIGNMENT:

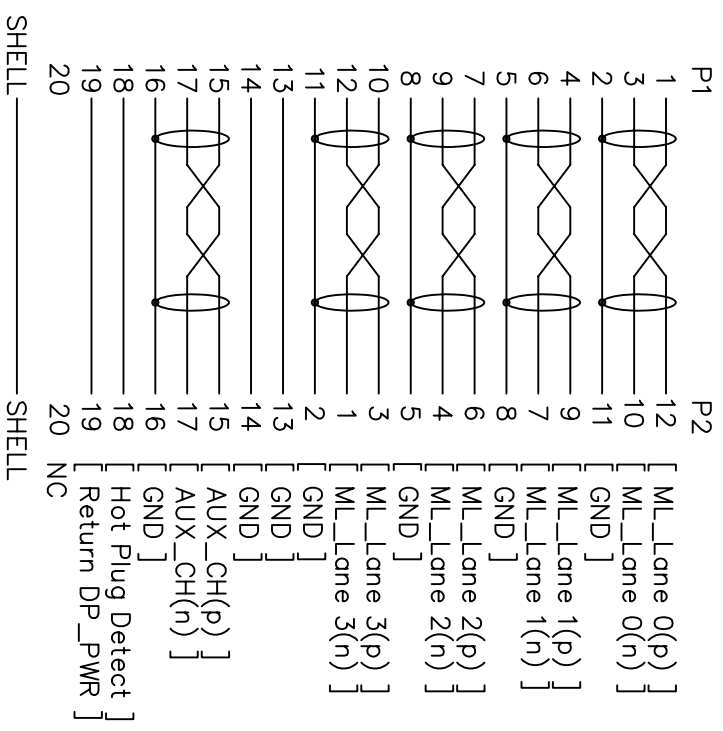

Electrical character:

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

4	SHEILD	COPPER FOIL_18u"
3	INNERMOLD	PE LOW DENSITY
2	CONNECTOR	DISP.LAYPORT PLUG CONTACT: PLATE GOLD SHELL: PLATE NI W/LATCH W/COVER BLACK
1	CABLE	UL20276 (28AWG*1PR+DRAIN WIRE+AL/MYLAR)*5 +28AWG*4C+AL/MYLAR+BRAID OD: 7.3 PVC JACKET BLACK IMPEDANCE: 100 Ohm

NO.	PART_NAME	SPEC_DESCRIPTION
INNERMOLD		TOLERANCE UNSPECIFIED
OVERMOLD		ANGLE
		MIKEY

DESIGNER:	NAME	SCALE	UNIT
CHECKED:	Displayport Cable	NON	mm
APPROVED:	DRAWING NO.	18-94202***	REV 1.0