


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

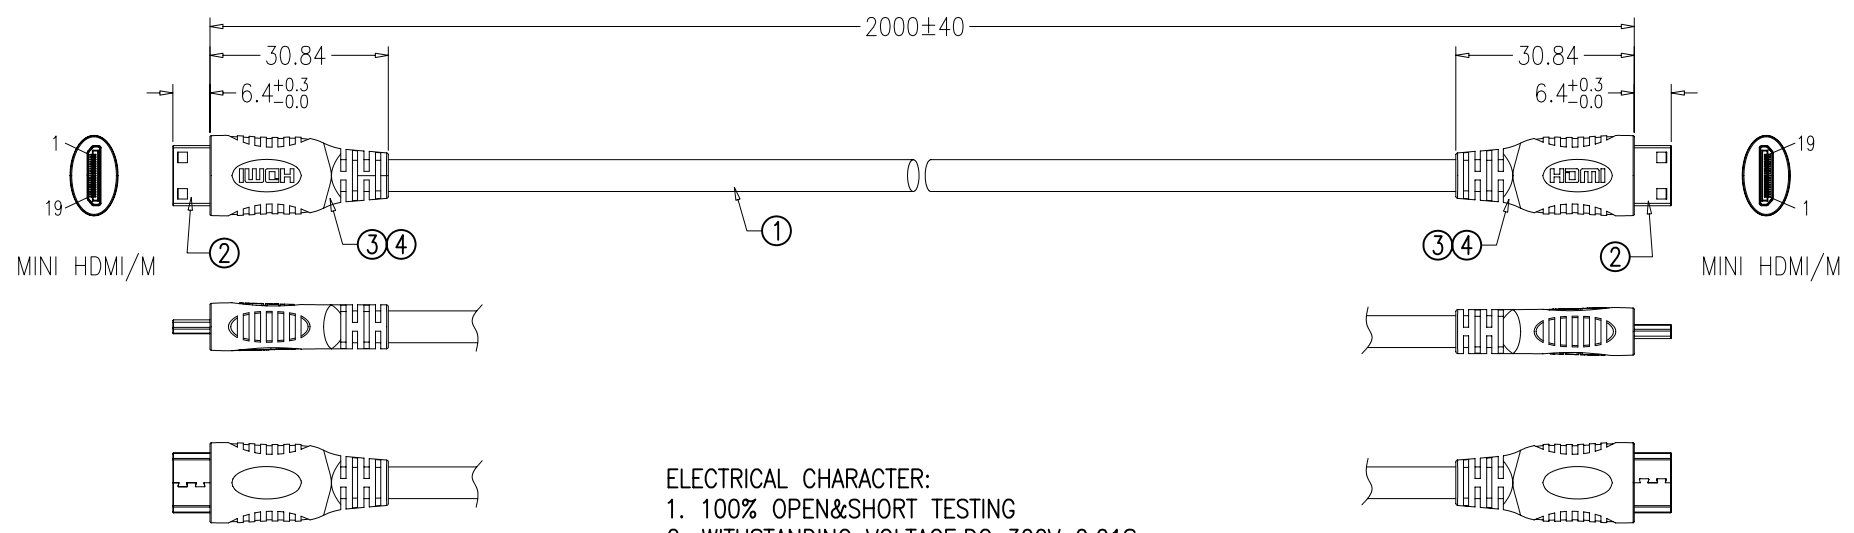

ELECTRICAL CHARACTER:
 1. 100% OPEN&SHORT TESTING
 2. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
 3. INSULATION RESISTANCE:10M Ohm(Min)
 4. CONDUCTIVE RESISTANCE:2 Ohm(Max)

PIN ASSIGNMENT:

HDMI/M	MINI HDMI/M
3	3 TMDS data2-
2	2 TMDS data2+
1	1 TMDS data2 Shield
6	6 TMDS data1-
5	5 TMDS data1+
4	4 TMDS data1 Shield
9	9 TMDS data0-
8	8 TMDS data0+
7	7 TMDS data0 Shield
12	12 TMDS Clock-
11	11 TMDS Clock+
10	10 TMDS Clock Shield
13	13 DDC/CEC Ground
14	14 CEC
15	15 SCL
16	16 SDA
17	17 Reserved
18	18 +5V Power
19	19 Hot Plug Detect
SHELL	SHELL

4	OVERMOLD	PVC 70Pα BLACK UL94V-0	
3	INNERMOLD	PE LOW DENSITY	
2	MINI HDMI	MINI HDMI 19P/M 30U"/AU BLACK SHELL G/F PLATED SOLDER TYPE WITH P.C.B	
1	HDMI CABLE	HDMI CABLE UL20276(1P*30#+AL+D+MYLAR)*4C+1P*30#+5C* 30#+AL+B OD5.5mm JACKET:PVC BLACK Impedance:100ohm	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
MATERIAL		TOLERANCE UNSPECIFIED	
FINISH		ANGLE	
		DRAWN: Daniel	SCALE NON UNIT mm
		DESIGNER:	NAME HDMI CABLE 30AWG(C TO C) SHEET 1/1
		CHECKED:	DRAWING NO. 18-9419**** REV 1.0
		APPROVED:	