


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

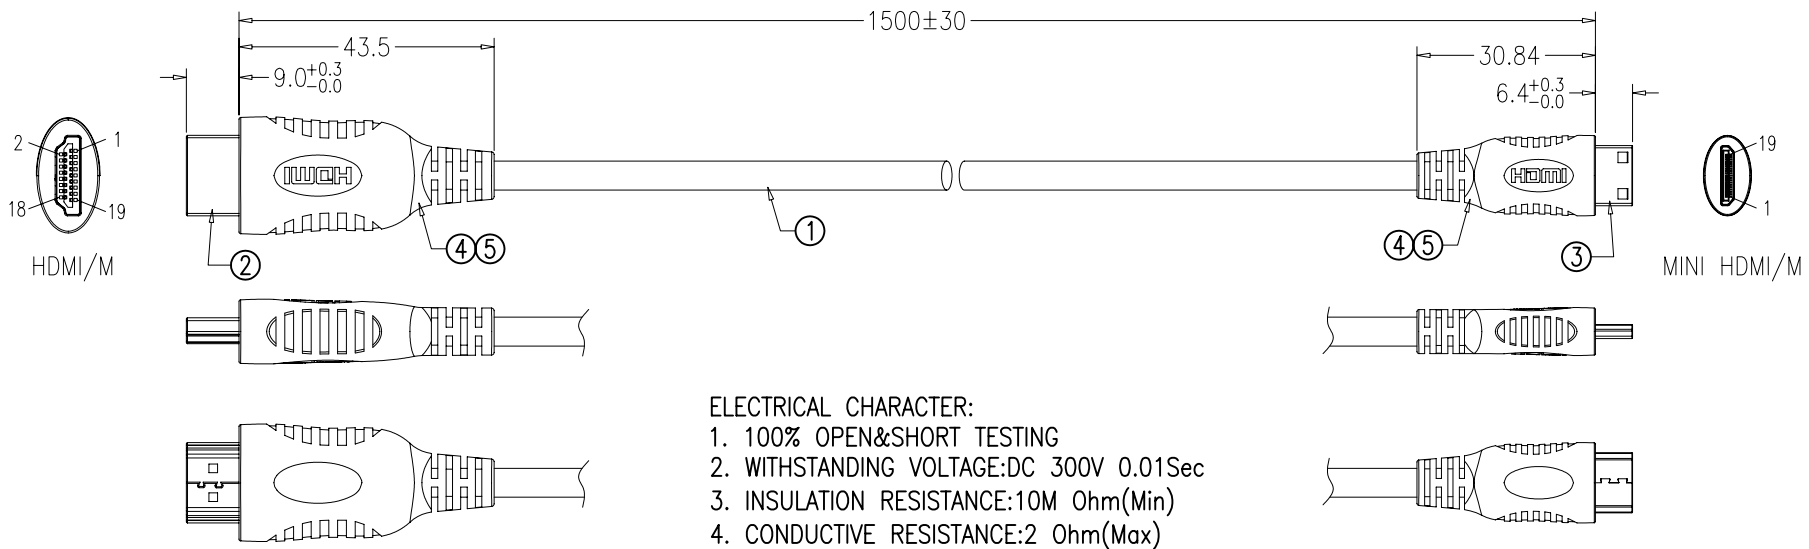

ELECTRICAL CHARACTER:
 1. 100% OPEN&SHORT TESTING
 2. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
 3. INSULATION RESISTANCE:10M Ohm(Min)
 4. CONDUCTIVE RESISTANCE:2 Ohm(Max)

PIN ASSIGNMENT:

HDMI/M	MINI HDMI/M
3	3 TMS data2-
1	2 TMS data2+
2	1 TMS data2 Shield
6	6 TMS data1-
4	5 TMS data1+
5	4 TMS data1 Shield
9	9 TMS data0-
7	8 TMS data0+
8	7 TMS data0 Shield
12	12 TMS Clock-
10	11 TMS Clock+
11	10 TMS Clock Shield
17	13 DDC/CEC Ground
13	14 CEC
15	15 SCL
16	16 SDA
14	17 Reserved
18	18 +5V Power
19	19 Hot Plug Detect
SHELL	SHELL

5	OVERMOLD	PVC 70Pa BLACK UL94V-0	
4	INNERMOLD	PE LOW DENSITY	
3	MINI HDMI	MINI HDMI 19P/M 30U"/AU BLACK SHELL G/F PLATED SOLDER TYPE WITH P.C.B	
2	HDMI	HDMI 19P/M 30U"/AU BLACK SHELL G/F PLATED SOLDER TYPE WITH P.C.B	
1	HDMI CABLE	HDMI CABLE UL20276(1P*32#+AL+D+MYLAR)*4C+1P*32#+5C* 32#+AL+B OD5.0mm JACKET:PVC BLACK Impedance:100ohm	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
MATERIAL		TOLERANCE UNSPECIFIED	
		± ± ± ± ± ANGLE ±	
FINISH		DRAWN: Daniel	NAME HDMI CABLE 32AWG(A TO C)
		DESIGNER:	SHEET 1/1
		CHECKED:	DRAWING NO. 18-9419****
		APPROVED:	REV 1.0
			SCALE NON UNIT mm