


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

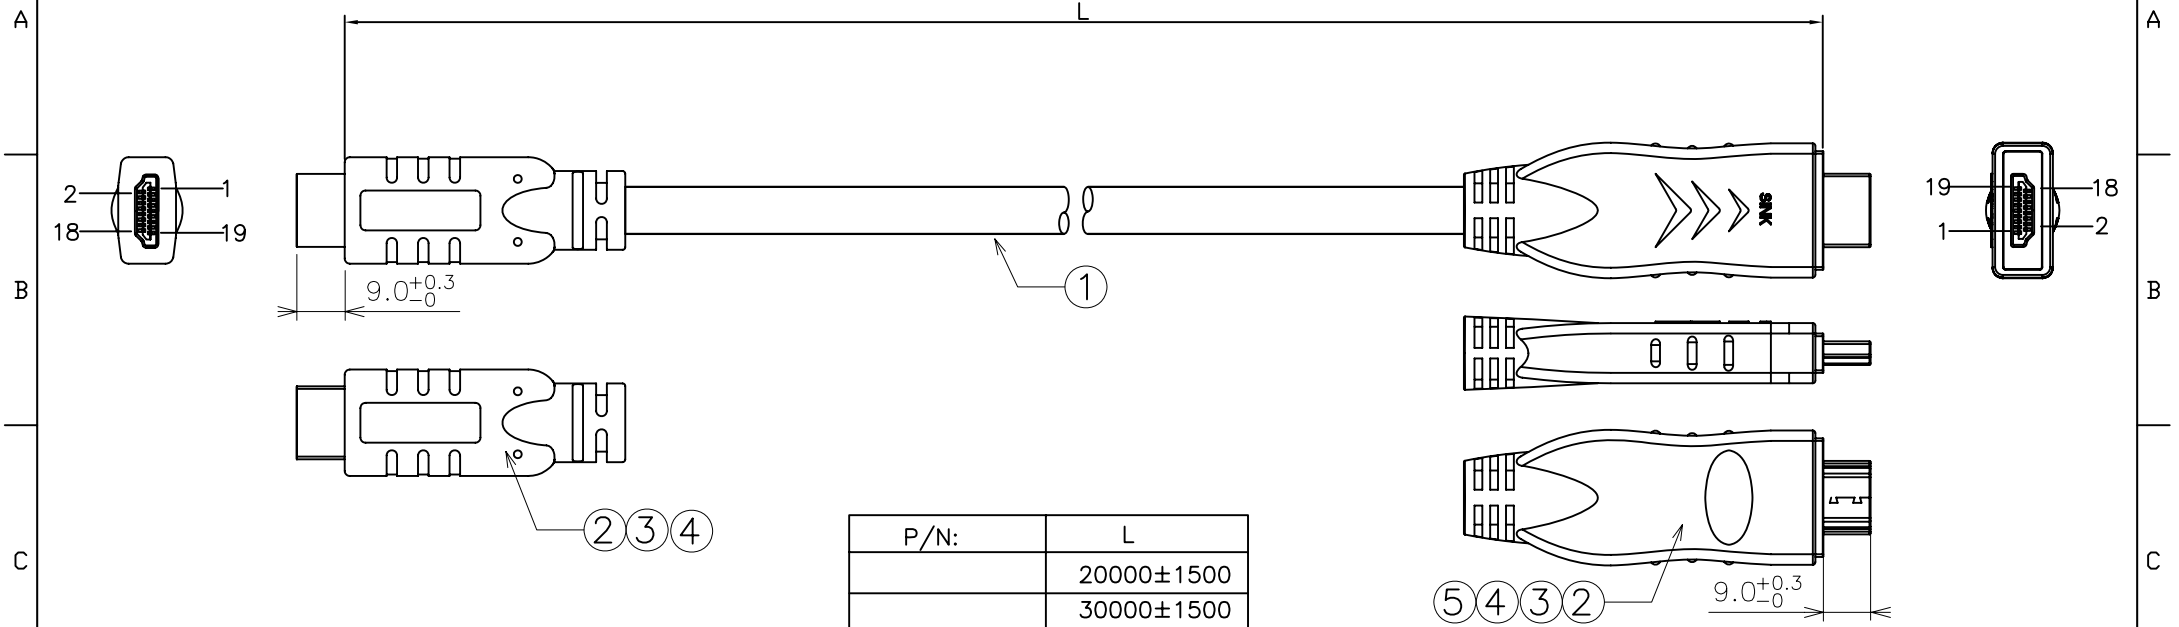


P/N:	L
	20000±1500
	30000±1500
	40000±2000
	45000±2000

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING
- HI-POT:DC300V 10ms
- INSULATION RESISTANCE:10M ohm(MIN)
- CONDUCTOR RESISTANCE:5.0 ohm(MAX)

PIN ASSIGNMENT:

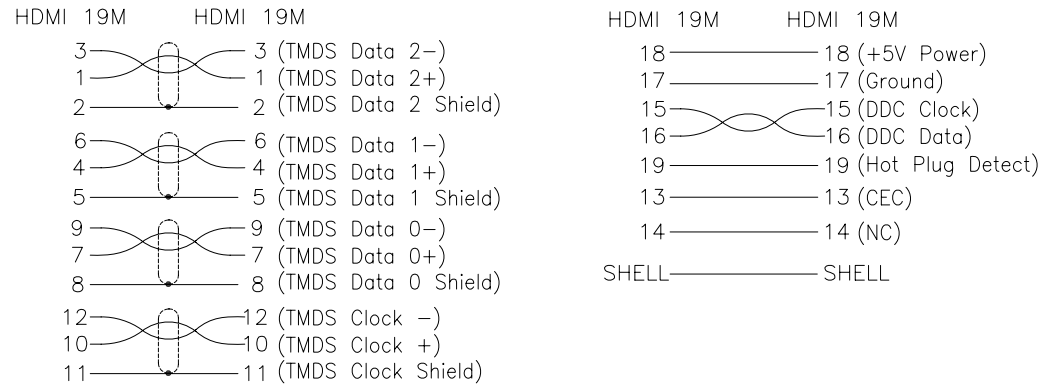

5	EQ	EQ for the Amplify the signal
4	OVERMOLD	PVC 70Pa BLACK UL94-V0
3	INNERMOLD	PE LOW DENSITY
2	HDMI CONN.	HDMI 19P MALE 30U"/AU BLACK SHELL G/F SOLDER TYPE WITH P.C.B
1	HDMI CABLE	UL20276 (24AWG*1PR+DRAIN WIRE+FREE EDGE AL/MYLAR)*4+24AWG*1P+24AWG*5C+AL/MYLAR +BRAID OD:10.5 BLACK IMPEDANCE:100 Ohm

NO.	PART NAME	SPEC DESCRIPTION
	MATERIAL	TOLERANCE UNSPECIFIED
		ANGLE ±
	FINISH	DRAWN XuHalbo
		DESIGNER
		CHECKED Owen
		APPROVED

FREEPORT	
SCALE NON	UNIT mm
NAME HDMI CABLE	
DRAWING NO. 18-9419*****	
SHEET 1/1	
REV 1.0	