

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

ORDERING INFORMATION

34E 068 S - 3 2 8 W - BB
 (1) (2) (3) (4) (5) (6) (7) (8)

- SERIES NUMBER:
34E: CHAMP 0.80mm STACKED R/A P.C.B. TYPE
- NUMBER OF CONTACTS:
068: 68 POSITIONS
- CONTACT CODES:
S: SOCKET
- COLOR CODES:
3: BLACK
- CONTACT FINISH:
0: SELECTED GOLD FLASH OVER 30u" NICKEL
2: SELECTED GOLD 15u" OVER 50u" NICKEL
3: SELECTED GOLD 30u" OVER 50u" NICKEL
- SHELL TYPE & FINISH:
8: METAL SHELL TYPE AND NICKEL PLATED
- ACCESSORY TYPE:
H: WITH SEPARATED M2X0.4 SCREWS
W: WITHOUT SCREWS AND HARPOONS
- SUFFIX NO.:
AB: WITH FREEPORT LOGO, SOLDER TAIL A=2.28[.090]
AD: WITH FREEPORT LOGO, SOLDER TAIL A=3.20[.126]
BB: WITHOUT FREEPORT LOGO, SOLDER TAIL A=2.28[.090]
BD: WITHOUT FREEPORT LOGO, SOLDER TAIL A=3.20[.126]

MATERIALS:

- HOUSING: THERMOPLASTIC, UL 94V-0 RATED.
- COVER: THERMOPLASTIC, UL 94V-0 RATED.
- CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATED
- SHELL: SPCC, NICKEL PLATED.
- HARPOON: COPPER ALLOY, TIN OVER NICKEL



SPECIFICATION:

- RATED CURRENT: 0.30A/CONTACT
- INSULATION RESISTANCE: 500MOHM MIN.
- DIELECTRIC WITHSTANDING VOLTAGE:
250V AC FOR 1 MINUTE.
- OPERATING TEMPERATURE: -25°C TO +85°C

34E068S-3*8-**-**		PART NO.	
		FREEPORT	
	SCALE 1:1	UNIT mm	SHEET 1/2
DRAWN <i>Winder</i> 12/26.05		NAME 68 POSITION CHAMP STACKED PITCH 0.80, RIGH ANGLE TYPE	
DESIGNER <i>Winder</i> 12/26.05		DRAWING NO. R-S134E-2	
CHECKED <i>Peterhu</i>		REV 1	
APPROVED <i>John</i>		A4 RS134E21	

RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

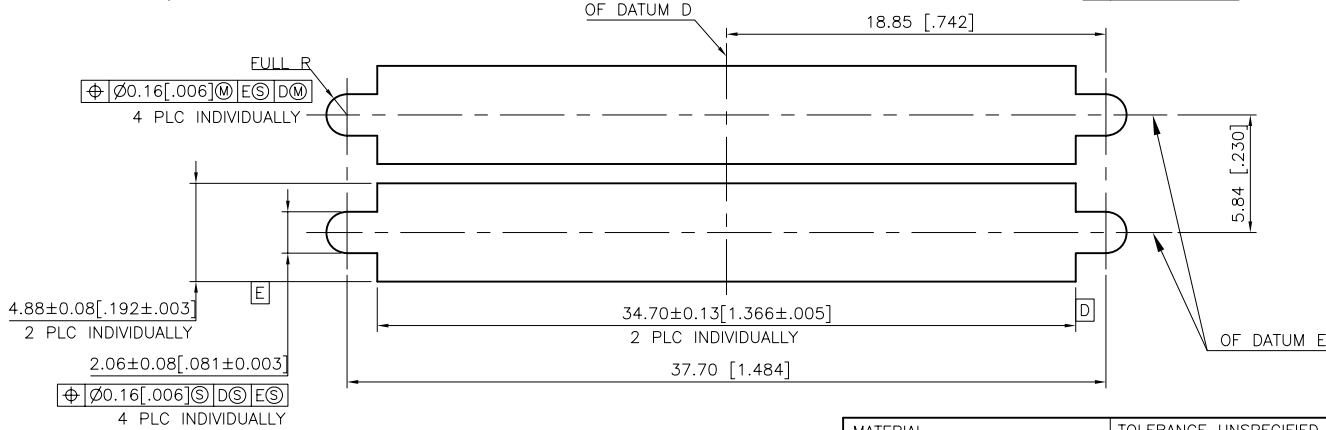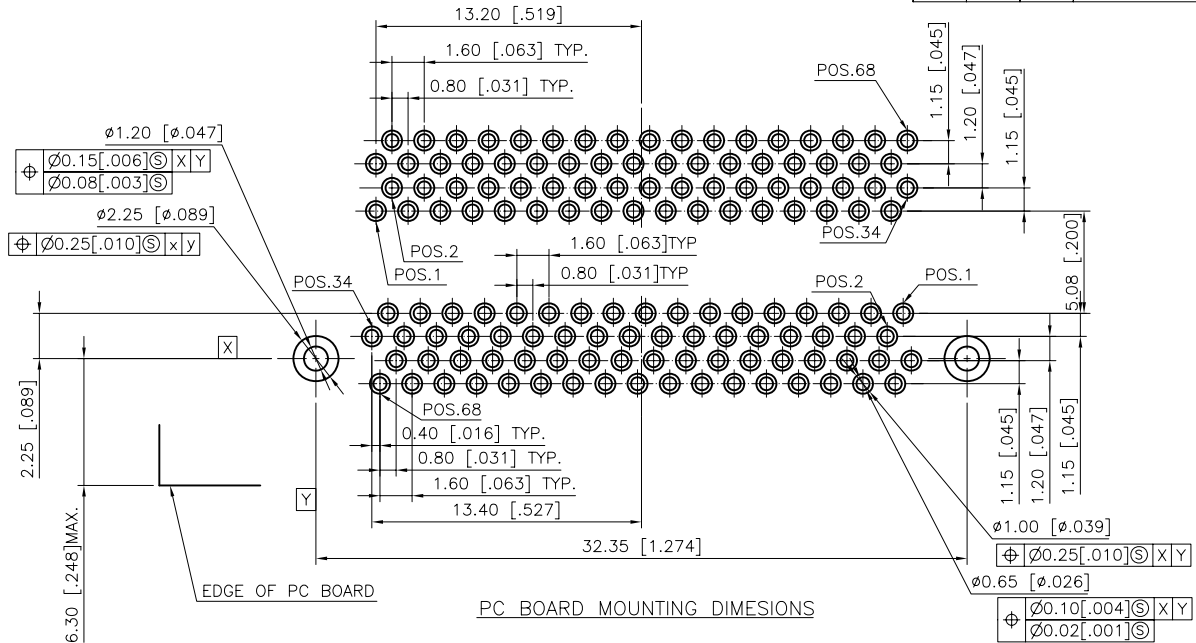

RoHS Compliant

MATERIAL	TOLERANCE UNSPECIFIED		
	± .25 ± .38 ANGLE ± 1°		
FINISH	DRAWN	SCALE	UNIT
	DESIGNER	1:1	mm
	CHECKED	NAME	
	APPROVED	SHEET	
DRAWN <i>Winder</i> 12/26.05 DESIGNER <i>Winder</i> 12/26.05 CHECKED <i>Peterhu</i> APPROVED <i>John</i>		68 POSITION CHAMP STACKED PITCH 0.80, RIGHT ANGLE TYE	
DRAWING NO. R-S134E-2		REV 1	