

| REV. | ZONE  | LTR | DESCRIPTION                                  | DATE    | REVISER | APPD |
|------|-------|-----|--|---------|---------|------|
| 2.0  |       | ①   | 新增成品料號                                       | 1/21'00 | 劉衛平     |      |
| 3    |       | ②   | 修改及新增成品料號                                    | 2/11'03 | MWLin   |      |
| 4    |       | ③   | 本体結構變更                                       | 7/11'04 | Lyh     |      |
| 5    | D6,E6 | ④   | 變更補充碼1(取消10,重新定義BB等代碼)<br>新增LCP材質及材質識別碼:補充碼2 | 12/9'05 | ZW      |      |


**.ORDERING INFORMATION**

34L 068 S - 3 3 6 H BB -HT  
 (1) (2) (3) (4)(5)(6) (7) (8) (9)

- SERIES NUMBER:  
34L:0.8mm CHAMP RIHGT ANGEL MINI CONN.  
P.C.B MOUNTING TYPE
- NUMBER OF CONTACT:  
068: 68 POSITIONS
- CONTACT TYPE:  
S: SOCKET
- COLOR CODE:  
3: BLACK
- CONTACT FINISH:  
2: 15u" SELECTIVED GOLD OVER 50u" NICKEL  
3: 30u" SELECTIVED GOLD OVER 50u" NICKEL
- SHELL TYPE & FINISH:  
6: DIE CASTING TYPE WITHOUT GROUNDING INDENTS, NICKEL PLATED
- ACCESSORY TYPE:  
H: WITH M2\*0.4 SCREWS & HARPOONS  
W: WITHOUT M2\*0.4 SCREWS & HARPOONS
- SUFFIX NO. 1 :  
④ BB: WITHOUT LOGO AND SOLDER TAIL 2.28mm  
④ CB: WITH "EDA INC" LOGO AND SOLDER TAIL 2.28mm
- SUFFIX NO.2:  
HT: PLASTIC MATERIAL IS LCP  
NONE: PLASTIC MATERIAL IS PBT

|                        |   |           |               |
|------------------------|---|-----------|---------------|
| TOLERANCE UNSPECIFIED  |   | PART NO.  |               |
| .0 0 0 ±               | .0 0 ±0.13                                    |           |               |
| .0 ±                   | . ±   |           |               |
| ANGLE ±                | DRAWN Lyh 7/15.04                             | SCALE 1:1 | UNIT mm(inch) |
| DESIGNER HILL 11/15.99 | NAME 68 POSITION,VHDCI RIGHT ANGLE,34L SERIES |           | SHEET 1/2     |
| CHECKED                | DRAWING NO. R-S134L-1                         |           | REV. 6        |
| APPROVED               |   |           |               |
|                        |   | A3        | RS134L11      |

| REV. | ZONE  | LTR | DESCRIPTION                                   | DATE    | REVISER | APPD |
|------|-------|-----|---|---------|---------|------|
| 5    | B6,C6 | △4  | 變更補充碼1(取消10, 重新定義BB等代碼)<br>新增LCP材質及材質識別碼:補充碼2 | 12/9'05 | ZW      |      |
| 6    | C4    | △5  | 修正尺寸37.70→32.35                               | 5/29'07 | Zhangy  |      |

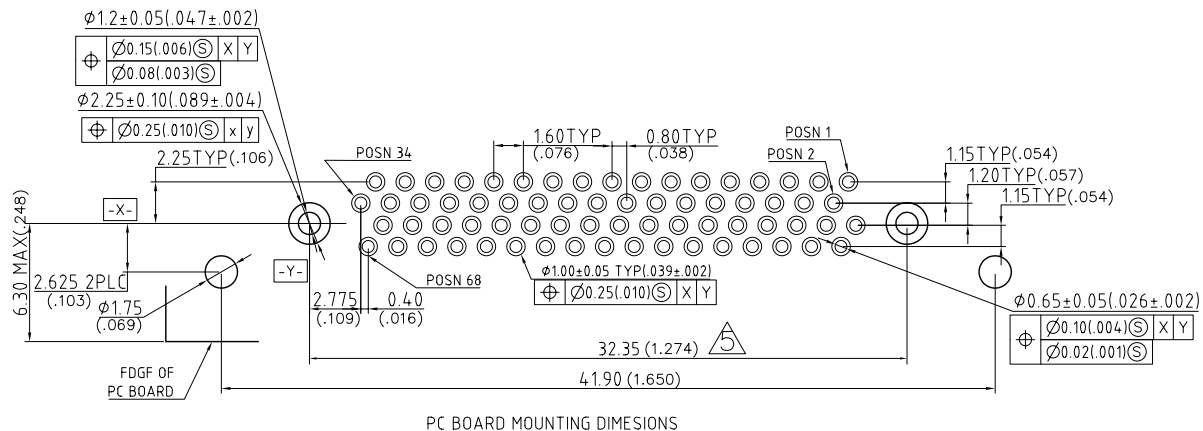


### NOTES

#### MATERIAL

- △4 HOUSING:THERMOPLASTIC WIHT G/F REINFORCED, UL 94V-0
- △4 COVER:THERMOPLASTIC WITH G/F REINFORCED, UL 94V-0
- CONTACT:PHOSPHOR BRONZE,GOLD OVER NICKEL
- BRACKET:ZINC ALLOY, NICKEL PLATED
- HARPOON:PHOSPHOR BRONZE, TIN OVER NICKEL

#### SPECIFICATION

- RATED CURRENT:0.30A
- INSULATION RESISTANCE:500MΩ MIN
- CONTACT RESISTANCE:50mΩ MAX
- DELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MIN
- OPERATING TEMPERATURE:-25°C~+85 °C

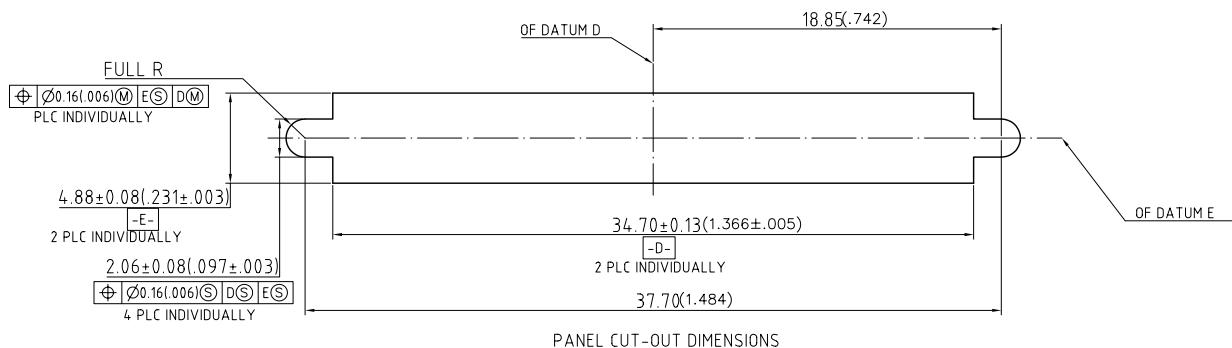

| MATERIAL |                | TOLERANCE UNSPECIFIED  | PART NO.        |        |
|----------|----------------|------------------------|-----------------|--------|
| X        | .000           | ±                      | <b>FREEPORT</b> |        |
|          | .00            | ±0.13                  |                 |        |
|          | .0             | ±                      |                 |        |
|          | .              | ±                      |                 |        |
| ANGLE    | ±              | SCALE                  | UNIT            |        |
|          |                | 1:1                    | mm(inch)        |        |
| FINISH   | DRAWN          | NAME                   |                 | SHEET  |
| X        | Zhangy 5/28.07 | 68 POSITION,VHDCI      |                 | [ ]    |
|          | DESIGNER       | RIGHT ANGLE,34L SERIES |                 | [ ]    |
|          | HILL 11/15.99  | DRAWING NO. R-S134L-1  |                 | REV. 6 |
|          | CHECKED        |                        |                 |        |
| APPROVED |                |                        |                 |        |
|          |                | A3                     | RS134L12        |        |