


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

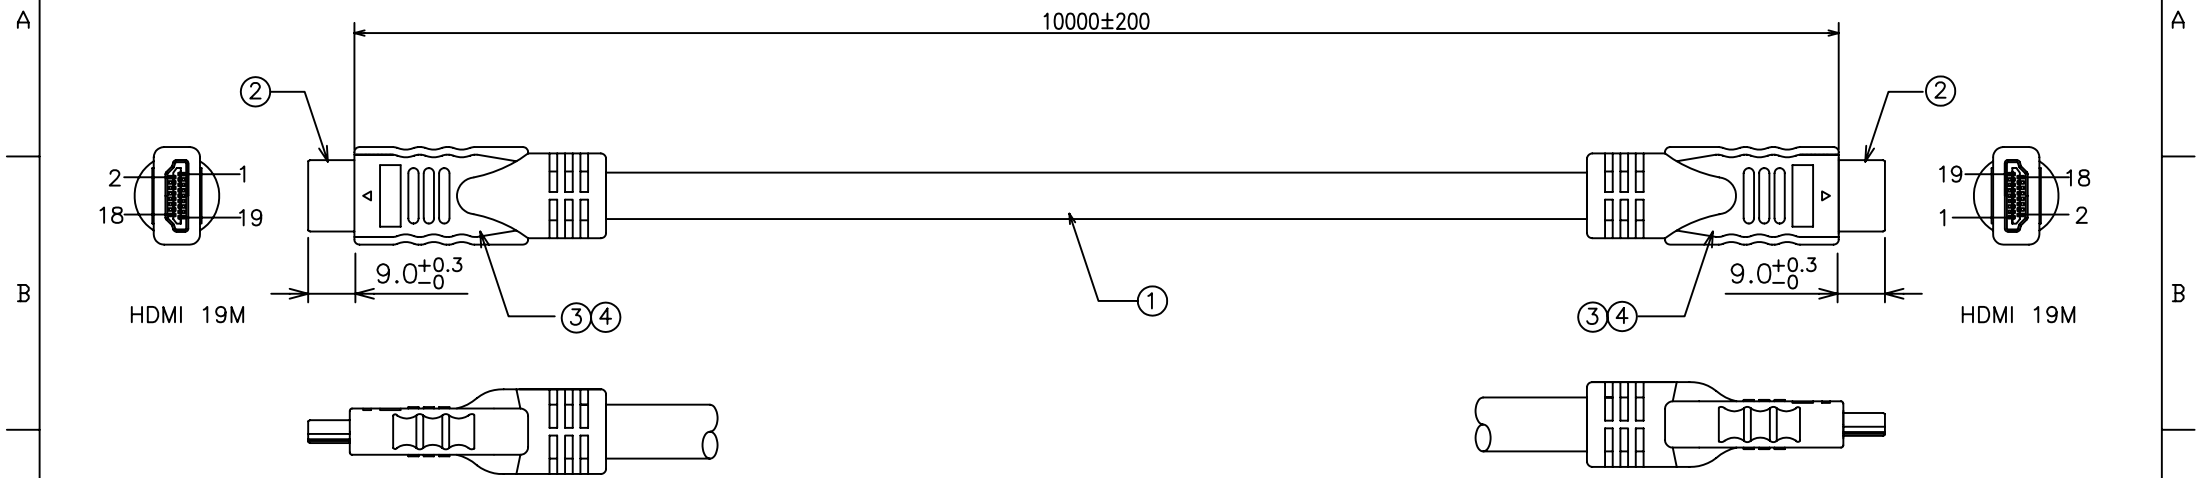


ELECTRICAL CHARACTER:


1. 100% OPEN&SHORT TEST
2. HI-POT:DC300V 10ms
3. Insulation Resistance:10 MOHM MIN
4. Contact Resistance:5.0 OHM MAX

PIN ASSIGNMENT:

HDMI 19P CONN. HDMI 19P CONN. HDMI 19P CONN. HDMI 19P CONN.

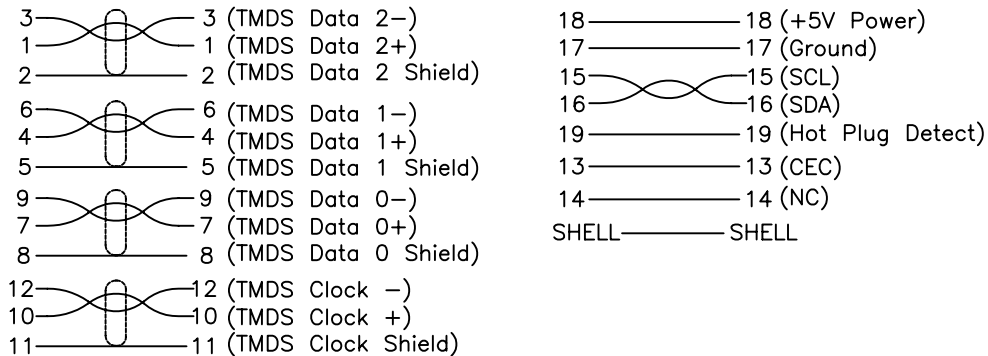

4	OVERMOLD	PVC 70Pa UL94V-0	
3	INNERMOLD	PE LOW DENSITY	
2	HDMI CONN.	HDMI 19P MALE 30U"/AU BLACK SHELL NI-PLATED SOLDER TYPE WITH P.C.B	
1	HDMI CABLE	UL20276 (24AWG*1PR+DRAIN WIRE+FREE-EDGE AL/MYLAR)*4 +24AWG*1P+24AWG*5C+AL/MYLAR+BRAID OD:10.5mm BLACK PVC IMPEDANCE:100 Ohm	

NO.	PART NAME	SPEC DESCRIPTION	REMARK											
MATERIAL		TOLERANCE UNSPECIFIED												
FINISH		<table border="1"> <tr> <td>±</td> <td>±</td> </tr> <tr> <td>±</td> <td>±</td> </tr> <tr> <td>±</td> <td>±</td> </tr> <tr> <td>±</td> <td>±</td> </tr> <tr> <td>±</td> <td>±</td> </tr> <tr> <td>±</td> <td>±</td> </tr> </table>		±	±	±	±	±	±	±	±	±	±	±
±	±													
±	±													
±	±													
±	±													
±	±													
±	±													
SCALE		NON	UNIT mm											
DRAWN: YHT		NAME												
DESIGNER:		HDMI CABLE (24AWG)												
CHECKED: OWEN		DRAWING NO.												
APPROVED:		SHEET 1/1												
		REV 1.0												

RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

A

B

C

D

E

F

A


B

C

D

E


F

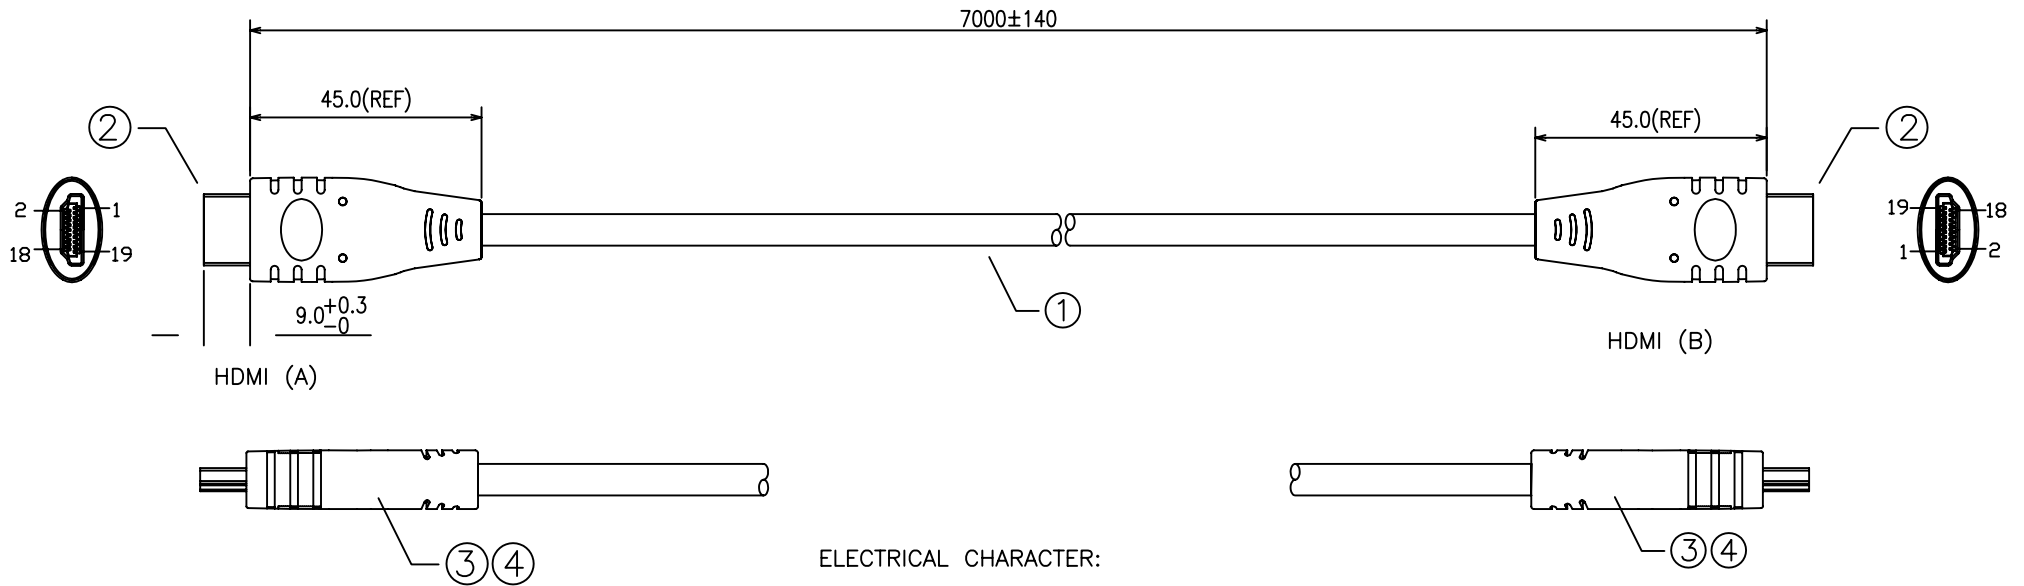

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TEST
2. HI-POT:DC300V 10ms
3. Insulation Resistance: 10M OHM MIN
4. Contact Resistance: 3 OHM MAX


PIN ASSIGNMENT:

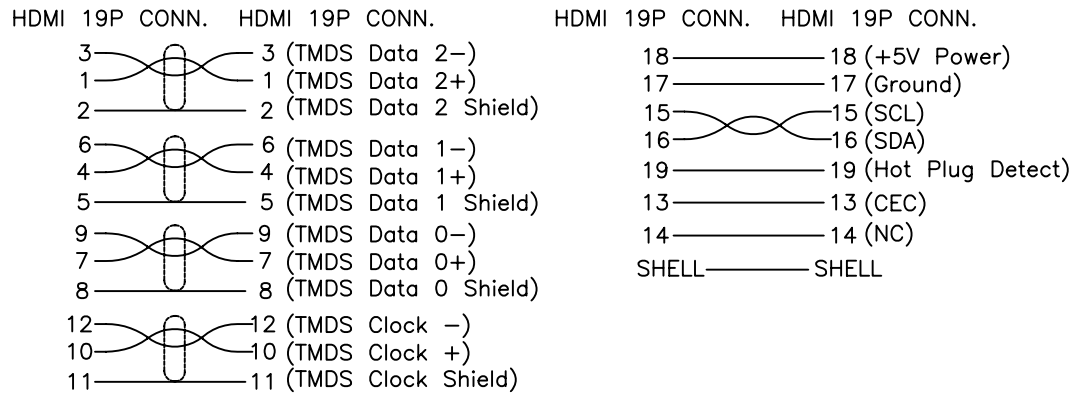

4	OVERMOLD	PVC RATED UL94V-0, BLACK COLOR	
3	INNERMOLD	PE LOW DENSITY	
2	HDMI CONN.	HDMI 19P MALE 30U"/AU BLACK SOLDER TYPE WITH P.C.B	
1	HDMI CABLE	UL20276 (26AWG(TC)*1PR+DRAIN WIRE+AL/MYLAR)*4 +26AWG*1P+26AWG*5C+AL/MYLAR+BRAID OD:8.5mm BLACK IMPEDANCE:100 Ohms	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
MATERIAL		TOLERANCE UNSPECIFIED	
FINISH		ANGLE	
		DRAWN: YHT	SCALE NON UNIT mm
		DESIGNER:	NAME
		CHECKED: OWEN	HDMI CABLE (26AWG) SHEET 1/1
		APPROVED:	DRAWING NO. REV 2.0

RoHS Compliant


REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

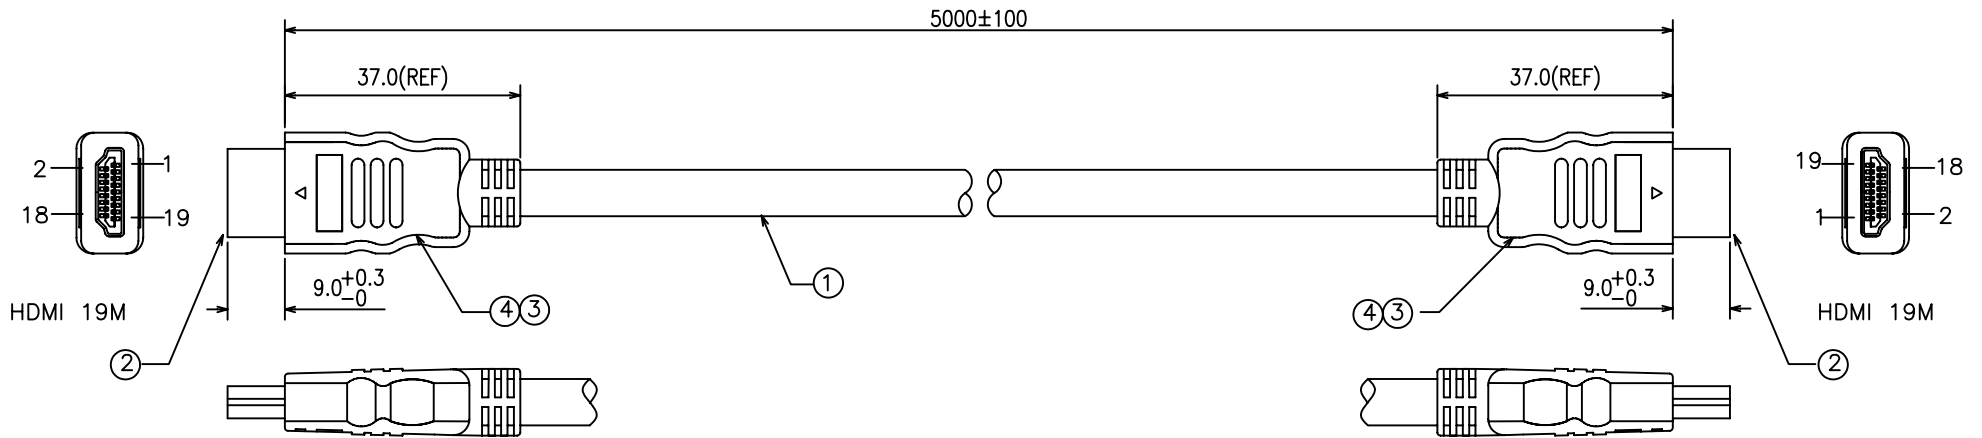

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TEST
2. HI-POT:DC300V 10ms
3. Insulation Resistance: 10M OHM MIN
4. Contact Resistance: 2 OHM MAX


PIN ASSIGNMENT:

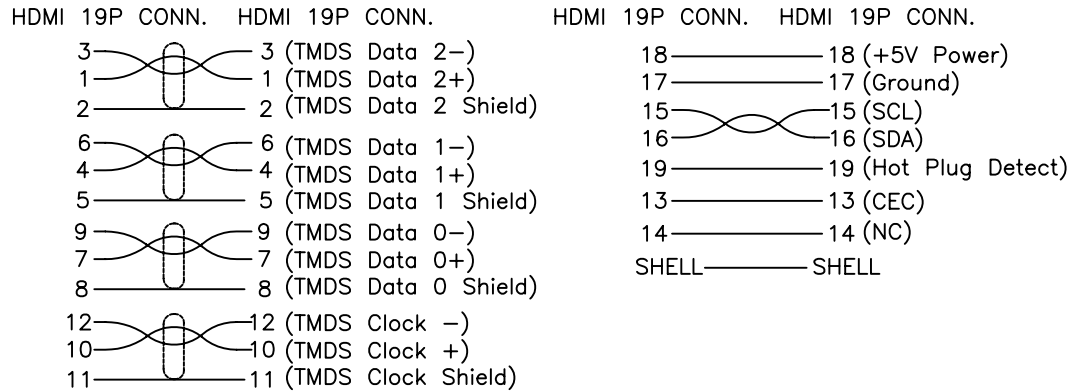

4	OVERMOLD	PVC 70Pa UL94-V0,COLOR:BLACK	
3	INNERMOLD	PE LOW DENSITY	
2	HDMI CONN.	HDMI 19P MALE 30U"/AU SHELL G/F BLACK SOLDER TYPE WITH P.C.B	
1	HDMI CABLE	UL20276(1P#28+D+FREE EDGE AL)*4+28AWG*1P+28AWG*5C+AL/MYLAR+BRAID,BLACK,OD: 7.3MM IMPEDANCE:100 Ohm	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
MATERIAL		TOLERANCE UNSPECIFIED	
FINISH		ANGLE ± ± ± ± ±	
		DRAWN: YHT DESIGNER: CHECKED: OWEN APPROVED:	SCALE NON UNIT mm NAME HDMI CABLE (28AWG) SHEET 1/1 DRAWING NO. REV 1.0

RoHS Compliant


REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

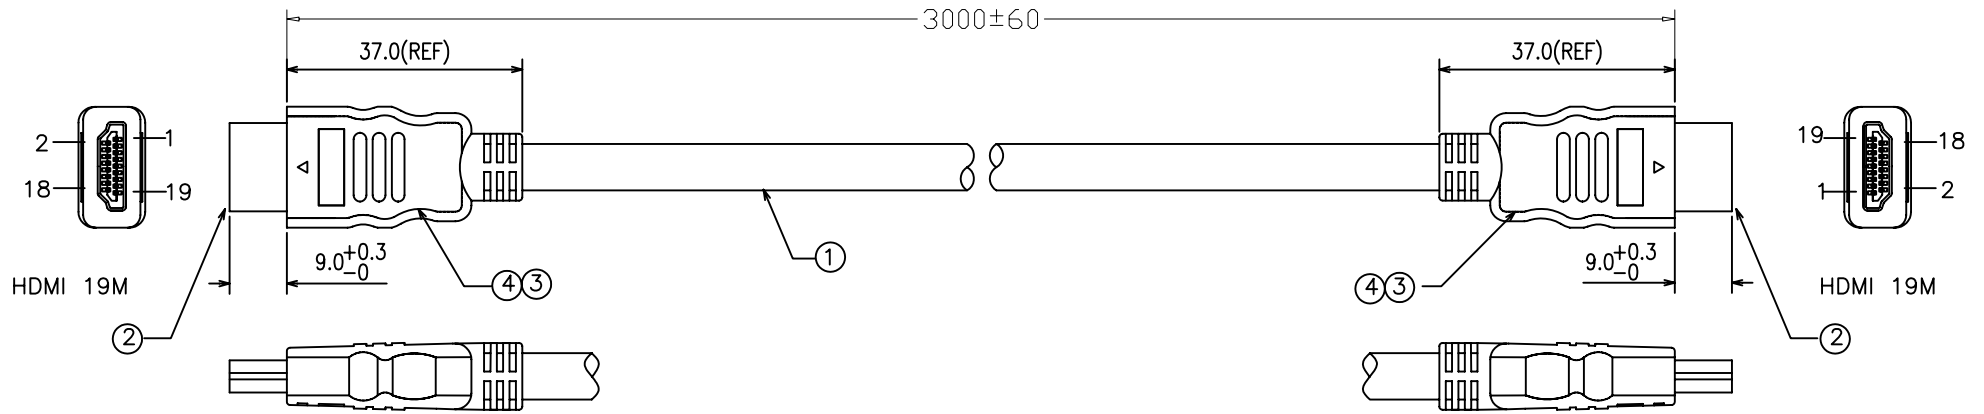

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TEST
2. HI-POT:DC300V 10ms
3. Insulation Resistance: 10M OHM MIN
4. Contact Resistance: 2 OHM MAX


PIN ASSIGNMENT:

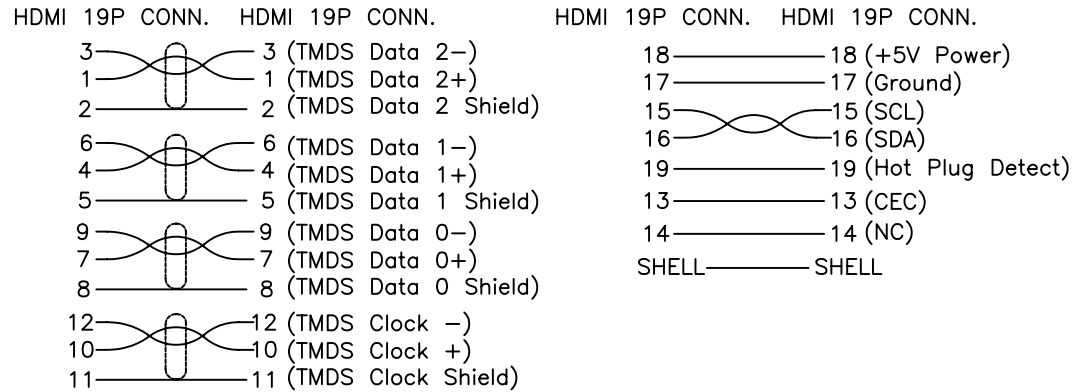


4	OVERMOLD	PVC 70Pa UL94-V0,COLOR:BLACK															
3	INNERMOLD	PE LOW DENSITY															
2	HDMI CONN.	HDMI 19P MALE 30U"/AU SHELL G/F BLACK SOLDER TYPE WITH P.C.B															
1	HDMI CABLE	UL20276(1P#28+D+FREE EDGE AL)*4+28AWG*1P +28AWG*5C+AL/MYLAR+BRAID,BLACK,OD: 7.3MM IMPEDANCE:100 Ohm															
NO.	PART NAME	SPEC DESCRIPTION	REMAKE														
MATERIAL	<table border="0"> <tr> <td>TOLERANCE UNSPECIFIED</td> <td rowspan="5"> </td> </tr> <tr> <td>±</td> </tr> <tr> <td>±</td> </tr> <tr> <td>±</td> </tr> <tr> <td>±</td> </tr> <tr> <td>ANGLE</td> <td>±</td> </tr> </table>		TOLERANCE UNSPECIFIED		±	±	±	±	ANGLE	±	SCALE NON UNIT mm						
TOLERANCE UNSPECIFIED																	
±																	
±																	
±																	
±																	
ANGLE	±																
FINISH	<table border="0"> <tr> <td>DRAWN: YHT</td> <td>NAME</td> <td rowspan="2">HDMI CABLE (28AWG)</td> <td rowspan="2">SHEET 1/1</td> </tr> <tr> <td>DESIGNER:</td> <td></td> </tr> <tr> <td>CHECKED: OWEN</td> <td>DRAWING NO.</td> <td></td> <td>REV 1.0</td> </tr> <tr> <td>APPROVED:</td> <td></td> <td></td> <td></td> </tr> </table>	DRAWN: YHT	NAME	HDMI CABLE (28AWG)	SHEET 1/1	DESIGNER:		CHECKED: OWEN	DRAWING NO.		REV 1.0	APPROVED:					
DRAWN: YHT	NAME	HDMI CABLE (28AWG)	SHEET 1/1														
DESIGNER:																	
CHECKED: OWEN	DRAWING NO.		REV 1.0														
APPROVED:																	

RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

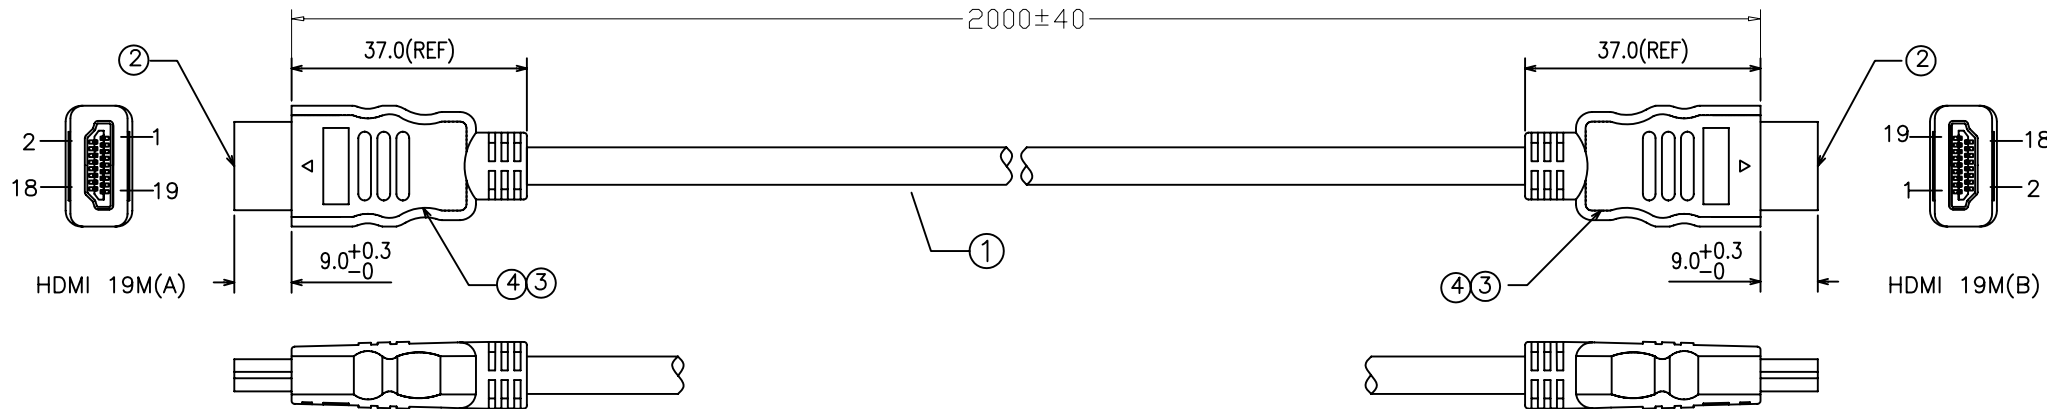

PIN ASSIGNMENT:

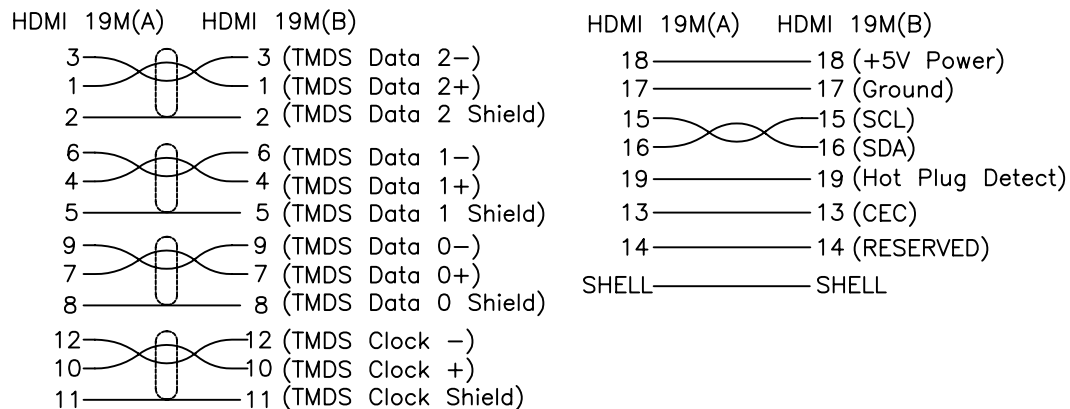

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TEST
- HI-POT:DC300V 10ms
- Insulation Resistance:10M OHM MIN
- Contact Resistance: 2 OHM MAX

4	OVERMOLD	PVC 70Pa BLACK UL94V-0						
3	INNERMOLD	PE LOW DENSITY						
2	HDMI CONN.	HDMI 19P MALE 30U"/AU BLACK SHELL G/F PLATED SOLDER TYPE WITH P.C.B						
1	HDMI CABLE	UL20276 (30AWG*1PR+DRAIN WIRE+FREE EDGE AL/MYLAR) *4+30AWG*1P+28AWG*5C+AL/MYLAR +BRAID OD:6.0 BLACK IMPEDANCE:100 Ohm						
NO.	PART NAME	SPEC DESCRIPTION	REMAKE					
MATERIAL		TOLERANCE UNSPECIFIED						
		<table border="0"> <tr><td>±</td></tr> <tr><td>±</td></tr> <tr><td>±</td></tr> <tr><td>±</td></tr> <tr><td>±</td></tr> <tr><td>±</td></tr> </table>		±	±	±	±	±
±								
±								
±								
±								
±								
±								
FINISH		ANGLE	SCALE NON UNIT mm					
		DRAWN: YHT	NAME HDMI CABLE (30AWG)					
		DESIGNER:		SHEET 1/1				
		CHECKED: OWEN	DRAWING NO.					
		APPROVED:		REV 1.0				